



DIMMLITE™

From **ROLASOLV™** - for Accommodation & Public Areas

DIMMLITE™ fabric roller blinds provide privacy for windows in many marine interior areas including offices, passenger and crew cabins, meeting rooms, lounges and more.

They are available in a large selection of flame retardant fabrics from dimming fabrics, and transparent fabrics to blackout fabrics.

DIMMLITE is also available in hundreds of fabric colours so that it can be perfectly co-ordinated to your exact requirements. The huge range of fabric colours give a warm and spacious feeling to your room.

Like all products in the ROLASOLV™ range DIMMLITE has been designed to be simple to install and easy to operate.

DIMMLITE is of course available in manual operation but for added luxury and hard to reach areas it is also available in electrical operation.



With first class **custom-made** products, **fast delivery, quality packaging, spare parts included** as standard, **excellent after sales service** and a **1-year Guarantee**, you'll wonder how you ever managed without DIMMLITE.

For more information


Contact our Customer Services Department on:

Tel. +44 (0) 191 454 8595 Fax. +44 (0) 191 454 8692


Email. info@rolasolv.com Visit. www.rolasolv.com

Types of Operation


There are several types of operation available for DIMMLITE roller blinds, the most common being shown below. Please contact our Technical Department for additional information.

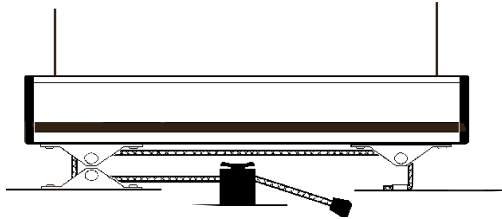

**DOUBLE PULLEY BOTTOM RAIL
CONSTANT TENSION SPRING.**
IDEAL FOR SLOPING WINDOWS.

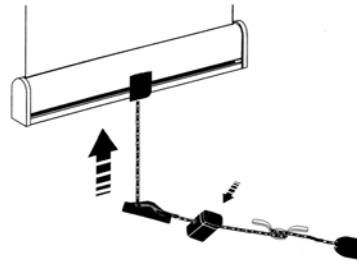


**CONSTANT TENSION SPRING-
CENTRE PULL**




SELF LOCK SPRING.

ALL SPRING OPERATED BLINDS / SCREENS ARE SUPPLIED WITH A CORD CLEAT

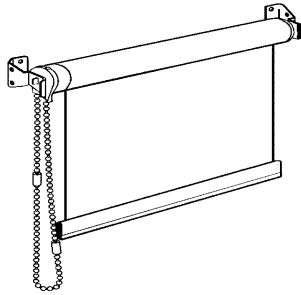

**LEFT OR RIGHT HAND
SIDE CHAIN CLUTCH**

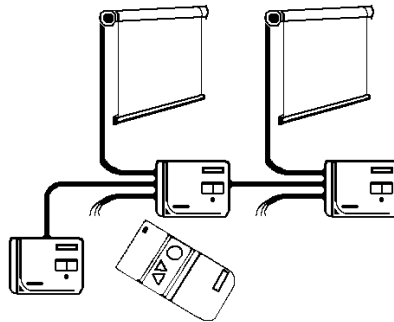

ELECTRIC BY REMOTE CONTROL, GROUP CONTROL AND / OR LOCAL INDIVIDUAL CONTROL - IDEAL FOR BLINDS THAT ARE DIFFICULT TO ACCESS.

LOW VOLTAGE (LoVo—24V D.C.) IS AVAILABLE FOR SMALLER SIZED ROLLER BLINDS. HIGH VOLTAGE (HiVo—230V A.C., 50HZ OR 60HZ) IS AVAILABLE OVER THE FULL RANGE OF ROLLER BLIND SIZES.

CONTACT THE TECHNICAL DEPARTMENT FOR MORE DETAILS.

Choice of Fabrics

A large selection of Flame Retardant fabric types and colours are available. Standard ranges include the following:

Blackout Fabric – 69% PVC, 23% Fibre Glass, 8% Adhesive with M1 Fire Classification (France). Easily cleaned with soap and water. Available in 12 standard colours: Navy Blue, Dark Green, Cranberry, Pink, Cream, Fawn, Pale Green, Ecru, Pale Blue, White, Grey and Black. Other colours available on request.

Lyverscreen® Fabric – 36% Fibre Glass, 64% PVC, Open weave fibreglass with flameproof vinyl coating, very versatile and easily maintained. Variations in the weave openness allow various degrees of outward visibility. 3 standard colours including White, White Sand, White Grey and White Pearle. With over 50 more available by special request.

Polyester Fabric – 100% Polyester. Available in 9 standard plain colours: Denim, Maroon, Ivory, Sunburst, Caramel, Apricot, Sky, Lavender, and Lily. Other colours also available on request.



Max and Min Dimensions

Maximum and minimum dimensions will vary depending on the type of operation and are shown below in mm.

Type of Oper'n	Max Width	Max Drop	Min Width	Min Drop
Consten Spring	3500	3500	400	250
Sidechain Clutch	3500	3500	325	250
LoVo Electric	1500	2200	400	250
HiVo Electric	4000	4000	600	250



Types of Fixing

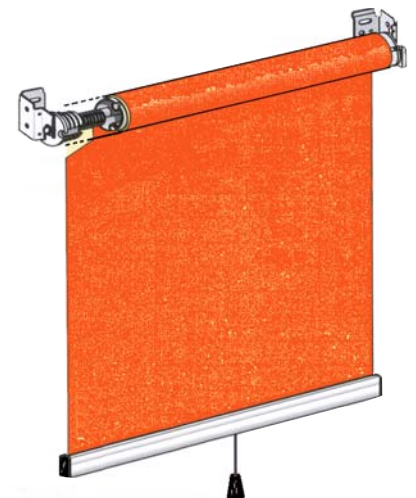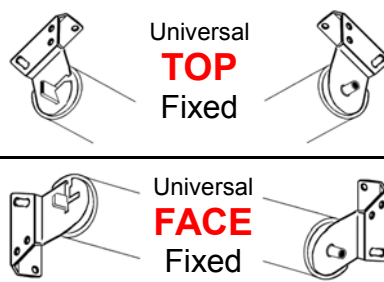

Technical Services:- If you require any advice or assistance with measuring, installation, wiring or operation of a roller blind or screen then please contact us. More detailed technical information sheets are available on request

Customer Services:- If you require general information, advice or assistance with placing orders or requesting quotations then please contact us. Quotation and Order forms can be immediately forwarded on request.