



LITETITE™

From ROLASOLV™ - for Accommodation & Public Areas

LITETITE™ is the complete blackout (99%) fabric roller blind – **ideal for environments where blackout conditions are sometimes required**, for example; chart rooms, control rooms, cinemas, training rooms, laboratories, workshops and accommodation areas.

LITETITE is housed in a protective anodised aluminium cassette complete with inner and outer aluminium side channels that prevent light entering.

Available in a large selection of fabric colours LITETITE effortlessly turns day into night, ensuring total privacy and giving a warm homely feel. The large selection of fabric colours means it can be perfectly co-ordinated to your other room decorations.

The aluminium side channels, cassette and bottom rail can also be co-ordinated to your choice of colour.



Like all Solar Solve products, LITETITE is designed with our customer in mind to ensure it is easy to install and simple to operate.

With first class **custom-made products**, **fast delivery**, **quality packaging**, **spare parts included**, **excellent after sales service** and a **2-year guarantee** you'll wonder how you ever managed without LITETITE.

For more information


Contact our Customer Services Department on:

Tel. +44 (0) 191 454 8595 Fax. +44 (0) 191 454 8692


Email. info@rolasolv.com Visit. www.rolasolv.com

Types of Operation


There are several types of operation available for **LITETITE** roller blinds, the most common being shown below. Please contact our Technical Department for additional information.

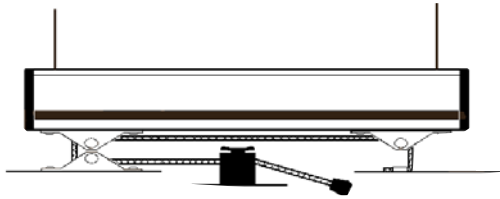

**DOUBLE PULLEY BOTTOM RAIL
CONSTANT TENSION SPRING
OUTSIDE RECESS ONLY**

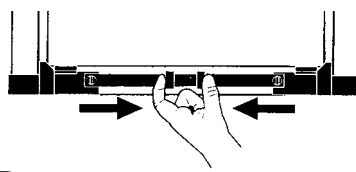

**CONSTANT TENSION SPRING
CENTRE RELEASE
INSIDE OR OUTSIDE RECESS**

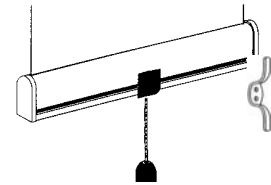


**CONSTANT TENSION SPRING
CENTRE PULL
OUTSIDE RECESS ONLY**

ALL SPRING OPERATED BLINDS WITH PULL CORD ARE SUPPLIED



**LEFT OR RIGHT HAND
SIDE CHAIN CLUTCH**

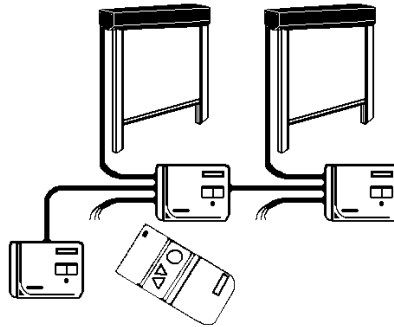


ELECTRIC BY REMOTE CONTROL, GROUP CONTROL AND / OR LOCAL INDIVIDUAL CONTROL - IDEAL FOR BLINDS THAT ARE DIFFICULT TO ACCESS.

LOW VOLTAGE (LoVo—24V D.C.) IS AVAILABLE FOR SMALLER SIZED ROLLER BLINDS. HIGH VOLTAGE (HiVo—230V A.C., 50HZ OR 60HZ) IS AVAILABLE OVER THE FULL RANGE OF ROLLER BLIND SIZES. CONTACT THE TECHNICAL DEPARTMENT FOR MORE DETAILS.


Blackout Fabric

- Composition:** 69% PVC, 23% Fibre Glass, 8% Adhesive
- Fire Classification:** France – M1
- Maintenance:** Easily cleaned with soap and water
- Colour Range:** Navy Blue, Dark Green, Cranberry, Pink, Cream, Fawn, Pale Green, Ecru, Pale Blue, White, Grey and Black.
Other colours available on request.

Types of Fixing



**2 Year
GUARANTEE**

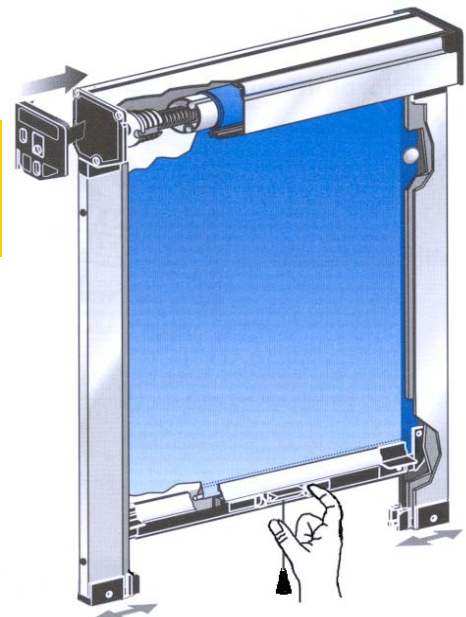

Max and Min Dimensions

Maximum and minimum dimensions vary depending on the type of operation and are shown below in mm.

Type of Operation	Max Width	Max Drop	Min Width	Min Drop
Const Ten Spring	3000	3000	450	250
Sidechain Clutch	3000	3000	350	250
LoVo Electric	1500	2200	400	250
HiVo Electric	4000	4000	600	250

Technical Services:- If you require any advice or assistance with measuring, installation, wiring or operation of a roller blind or screen then please contact us. More detailed technical information sheets are available on request

Customer Services:- If you require general information, advice or assistance with placing orders or requesting quotations then please contact us. Quotation and Order forms can be immediately forwarded on request.