


INSTRUCTIONS

[1] CHOOSE PRODUCT TYPE...

- SOLASAFE (SS)** FILM SUNSCREEN INSIDE AN ALUMINIUM CASSETTE
SOLAROLA (SR) FILM SUNSCREEN WITHOUT AN ALUMINIUM CASSETTE
- CASSLITE (CL)** FABRIC ROLLER BLIND INSIDE AN ALUMINIUM CASSETTE
DIMMLITE (DL) FABRIC ROLLER BLIND WITHOUT AN ALUMINIUM CASSETTE
- LITETITE (LT)** BLACKOUT BLIND INSIDE AN ALUMINIUM CASSETTE WITH INNER AND OUTER SIDE CHANNELS

[3] CHOOSE BRACKET TYPE...

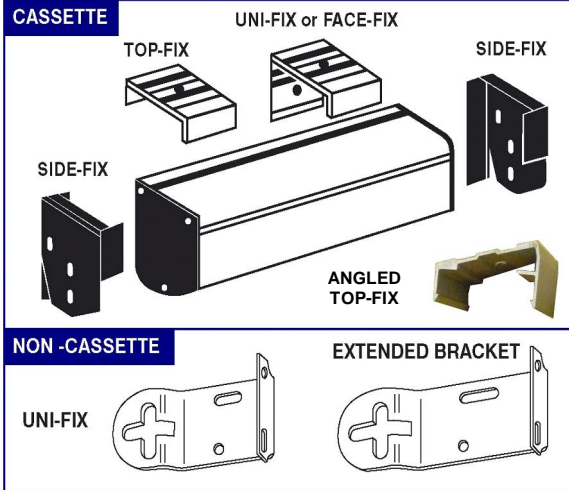

UNI-FIX BRACKETS ALLOW THE SCREEN / BLIND TO BE BOTH TOP FIXED AND FACE FIXED. IF UNSURE CHOOSE THESE BRACKETS.

FOR INVERTED INSTALLATIONS CHOOSE UNI-FIX


FOR INCLINED WINDOWS 15°+ FROM THE VERTICAL CHOOSE ANGLED TOP-FIX BRACKETS

CODE


- TF** = TOP-FIX
ATF = ANGLED TOP-FIX
UF = UNI-FIX
SF = SIDE-FIX

[2] CHOOSE SCREEN / BLIND SHAPE...

N.B. FOR UNEQUAL TAPERS THE LEFT HAND OFFSET (LHO) MUST BE SUPPLIED AS WELL AS THE BOTTOM RAIL (BR) WIDTH

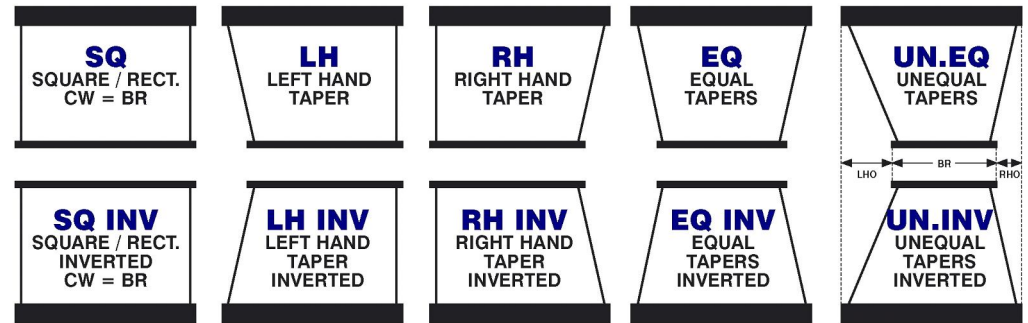

[4] CHOOSE OPERATING SYSTEM...

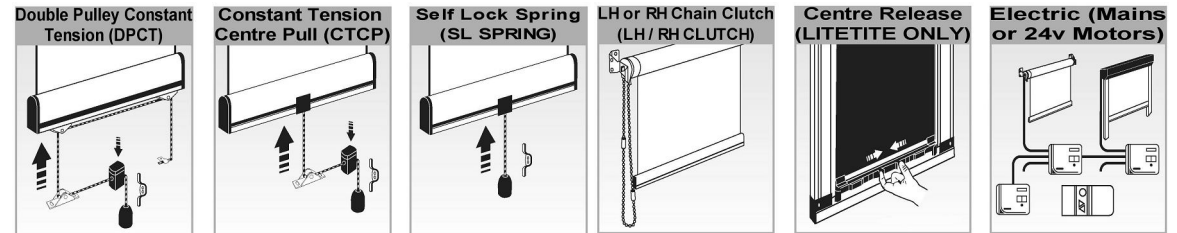

DPCT = CONSTANT TENSION SPRING WITH DOUBLE PULLEY BOTTOM RAIL

CTCP = CONSTANT TENSION SPRING WITH CENTRE PULL

LH CLUTCH = LEFT HAND CHAIN CLUTCH


ELECTRIC = MAINS POWER OR 24V MOTORS

SL SPRING = SELF LOCK SPRING


RH CLUTCH = RIGHT HAND CHAIN CLUTCH

BATTERY = BATTERY OPERATION WITH REMOTE


[5] MEASURING INSTRUCTIONS...

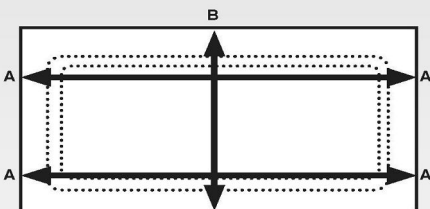

Carefully measure **width 'A'** at two points to identify the recess and window shape e.g. square or tapered. Use the smallest size for 'A' and mark as INSIDE recess. Solar Solve will then deduct 6 mm from the width. This is the WIDTH dimension (also known as the CW=Cassette Width on the SOLASAFE screen or PW=Pin Width on the SOLAROLA screen). Carefully measure 'B' as the **DROP** dimension.

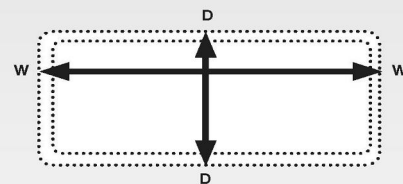

Decide where the blind/screen is to be installed and carefully measure the **width 'W'** and **drop 'D'**. Give the width dimension 'W' as CW = Cassette Width or PW = Pin Width and the dimension 'D' as the **drop RD** = Required Drop.

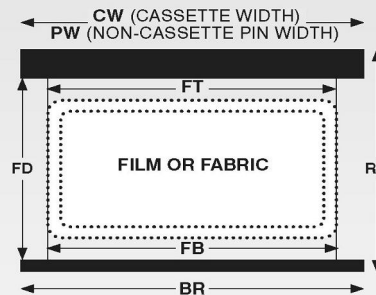

FT = Film / Fabric Top Width (CW or PW less 38mm)

FB = Film/Fabric Bottom Width (BR less 38mm)

FD = Film/Fabric Drop

BR = Bottom Rail Width

RD = Required Drop

[6] CHOOSE FILM COLOUR

SOLASOLV		
FILM COLOURS AVAILABLE		
Name	INSide	OUTSide
GOLD	Grey	Gold
SILVER	Grey	Silver
GREY	Grey	Grey
BRONZE	Bronze	Bronze

[7] OPTIONS...

